


Height: 10mm/Width: 20mm/Length: 43mm (MXJ4)

Air Slide Table

Front mounting accuracy Note 1): 0.01 mm / Top mounting accuracy Note 2): 0.03 mm

Traveling parallelism: 0.005 mm

L-shaped table results in a highly accurate and rigid top and front mounting surface.

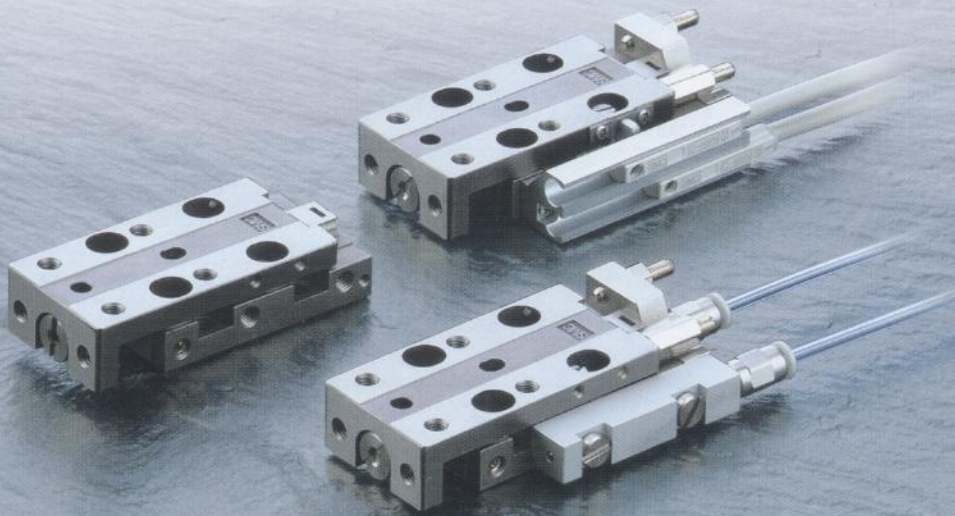


Note 1) Right angle degree of the front mounting surface to the body mounting surface
 Note 2) Parallelism of the front mounting surface to the body mounting surface

M3 or M4 size screws are used for body mounting.

(Except for ø4.5 top mounting)

Prevents damage to the screws when mounting

Bore size (mm)	4.5	6	8
Threads for through-hole mounting on the top	M2.5	M3	M3
Threads for tap mounting on the bottom	M3	M4	M4



Auto switch mountable in two rows

- Auto switches can be mounted in two rows for all models in the range of ø4.5 to ø8.
- Two auto switches can be mounted with a 5 mm or longer stroke.







Actual size

(MXJ6-10)

1 *Plugs for the symmetrical type

- 1 Piping port
- 2 Axial piping plate
- 3 Axial piping port
- 4 Retraction stroke end adjuster
- 5 Extension stroke end adjuster
- 6 Switch rail

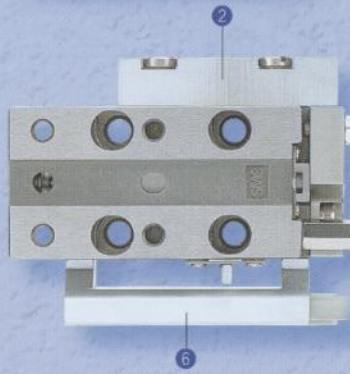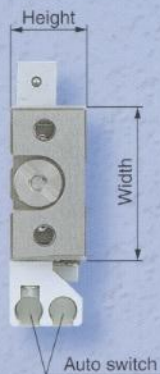

Unit: mm

Bore size	Total length	Width	Height
4.5	43	20	10
6	43 ^{Note 1)}	22	11
8	45 ^{Note 2)}	26	13

Note 1) The total length is 48 mm when the stroke is 15 mm.

Note 2) The total length is 55 mm when the stroke is 15 mm or 20 mm.

Coming soon!


3 Axial Piping



Wiring and piping can be aligned in the same direction.

Symmetrical Style

Piping ports are provided on both the right and left side. Switch rails and axial piping plates are interchangeable between the right and left side.

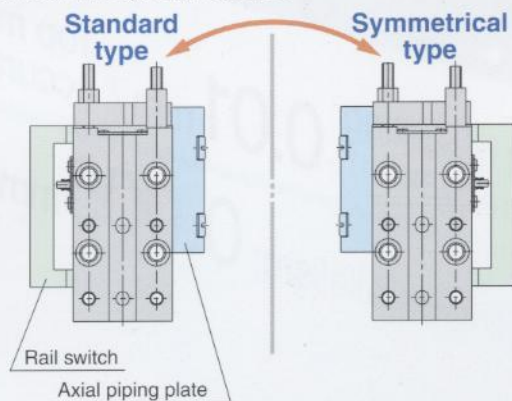

Clean Specification

Clean specification products are available with no dimensional changes. The same options are available as for standard products.

Variation

Model		Bore size (mm)	Standard stroke (mm)				Adjuster option			Piping option
Standard type	Symmetrical type		5	10	15	20	Extension end	Retraction end	Both ends	Axial piping type
MXJ4	MXJ4L	4.5	●	●	—	—	●	●	●	●
MXJ6	MXJ6L	6	●	●	●	—	●	●	●	●
MXJ8	MXJ8L	8	●	●	●	●	●	●	●	●

Small product lines



ø2 Miniature fittings
Series M

ø2 One-touch fittings
Series KJ

Speed controller with ø2 One-touch fitting
Series AS



ø2 Polyurethane tubing
Series TU



7 mm wide compact pilot operated 5 port solenoid valve
Series S0700

SMC Corporation

1-16-4 Shimbashi, Minato-ku, Tokyo 105-8659 JAPAN
Tel: 03-3502-2740 Fax: 03-3508-2480
URL <http://www.smcworld.com>
© 2004 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

D-KS

1st printing IY printing IY 130KS Printed in Japan.

This leaflet is printed on recycled paper with concern for the global environment.